

Lexmark X644e

Intelligent workgroup MFP featuring the e-Task color touch screen



LEXMARKTM

Lexmark X644e


- Print, copy, scan and fax are standard features with output performance at up to 50 ppm
- Lexmark's enterprise security provides secure management, secure network communications and secure information storage
- Easily capture and send documents electronically with the intuitive e-Task color touch-screen

Key Message	Intelligent workgroup MFP featuring the e-Task color touch screen
In the Box	<ul style="list-style-type: none"> • X644e MFP • 10,000-page Return Program Print Cartridge • Setup Sheet • Software and Documentation CD • Power Cord • RJ-11 Phone Cable
Part Number (US/Can.)	22G0320
Product Class	Workgroup laser MFP
Speed	
Print	up to 50 ppm (letter)
Copy	up to 35 ppm (letter)
Scan	Black: up to 35 ppm (letter); Color: up to 17 ppm (letter)
Time to First Page	As fast as 8.5 seconds
Resolution	Copy: 600 x 600 dpi; Print: 1200 x 1200 dpi, 2400 image quality printing, 600 x 600 dpi
Processor	533 MHz
Memory (std./max.)	256MB/768MB
Connectivity	
Standard	Print: USB, Ethernet; Scan: Ethernet; USB Direct Interface: Scan and Print; Card Reader: USB
Optional	Parallel, Serial,Wireless
Option Slots	DRAM DIMM slots: 1; ISP (INA) slots: 1; Firmware Card/Flash memory slots: 2
Printer Languages	PostScript 3, PCL 6, PPDS Migration Tool and direct PDF v1.5 printing
Fonts	PostScript: 158 scalable; PCL: 89 scalable including OCR-A, OCR-B and Code 3 of 9 bar codes, 2 bitmapped; PPDS: 39 scalable, 5 bitmapped
Operating Systems	Microsoft Windows, Mac, NetWare, UNIX and Linux
Acoustics	Printing: 56 dBA; Copying: 57 dBA; Scanning: 52 dBA; Idle: 30 dBA
Size (WxDxH)	22 in. x 25.4 in. x 28 in. (560 mm x 645 mm x 710 mm)
Weight	83 lb. (37.7 kg)
Paper Capacity	
Standard Input	600 (500 + 100 MPF)
Maximum Input	4100 (500 + 500 + 500 + 500 + 2000 + 100 MPF)
Standard Output	500
Maximum Output	500
Paper Sources	
Standard Input	2
Maximum Input	7
Standard Output	1
Maximum Output	1
Media Information	
Types	Plain paper, paper labels, card stock, transparencies, envelopes, vinyl labels, polyester labels, Dual Web and Integrated labels
Size	Letter, Legal, A4, A5, JIS B5, Executive, Folio, Statement, Universal (2.75 in. x 5 in. to 8.5 in. x 14 in), envelopes (7 3/4, 9, 10, DL, C5, B5)
Weight	Plain Paper: 16 to 47 lb. (60 to 176 g/m ²); Card stock: up to 110 lb. index (199 g/m ²)
Warranty	1-year OnSite Repair

Lexmark X644e

Scanner Specifications	
Scanner Type	Color/Mono Flatbed with ADF
Max Optical Resolution	600 x 600 dpi (mono); 600 x 300 dpi (color)
Scan Area (flatbed)	8.5 in. X 14 in. (216 mm X 356 mm)
Scanner ADF	
Type	Single-pass Duplex with C-Path
Capacity	50 sheets at 20 lb. (75 g/m ²)
Media Weights	Minimum: 15 lb. (56 g/m ²); Maximum: 32 lb. (128 g/m ²)
Max Speed	Mono: Up to 35 spm; Color: Up to 17 spm
Scan Area (ADF)	Minimum: 4.5 in. x 5.5 in. (114 mm x 139.7 mm); Maximum: 8.5 in. x 14 in. (216 mm x 356 mm)
Fax Specifications	
Standard Fax Modem	Analog; 33.6 Bps max
Transmission Speed	Approximately 3 seconds per page
Speed Dials	Minimum 5,000 (based on 10-digit phone number)
Resolutions	200 x 100 dpi, 200 x 200 dpi, 300 x 300 dpi, 400 x 400 dpi

Paper Handling Options

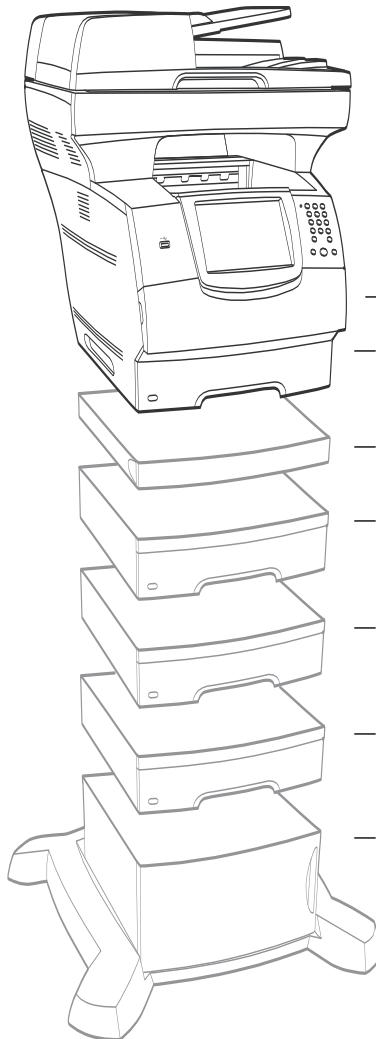

- 100-Sheet Multipurpose Feeder
- 500-sheet Drawer (20G0890)
- 500-sheet Duplex Unit (20G0888)
- 500-sheet Drawer (20G0890)
- 500-sheet Drawer (20G0890)
- 500-sheet Drawer (20G0890)
- 2,000-sheet Drawer, letter only (20G0892)

Options not pictured

- 250-sheet Drawer (20G0889)
- 250-sheet Tray (20G0879)
- 500-sheet Tray (20G0884)
- 250-sheet Universally Adjustable Drawer (20G1223)
- 400-sheet Universally Adjustable Drawer (20G1218)
- 250-sheet Universally Adjustable Tray (20G1224)
- 400-sheet Universally Adjustable Tray (20G1217)
- 85-sheet Envelope Feeder (20G0891)

Supplies & Accessories

Part Number

Solutions	Font Cards (Double-Byte Character Set) Traditional Chinese Font Card Japanese Font Card Korean Font Card Simplified Chinese Font Card Bar Code Card PRESCRIBE Card Card for IPDS and SCS/TNe	1021242 1021243 1021240 1021241 22G0350 22G0354 22G0351
Supplies	32,000-page Extra High Yield Return Program Print Cartridge ¹ 32,000-page Extra High Yield Return Program Print Cartridge for Label Applications ¹ 21,000-page High Yield Return Program Print Cartridge ¹ 21,000-page High Yield Return Program Print Cartridge for Label Applications ¹ 10,000-page Return Program Print Cartridge ¹ 32,000-page Extra High Yield Print Cartridge ¹ 21,000-page High Yield Print Cartridge ¹ 10,000-page Print Cartridge ¹ Maintenance Items: Separator Roll Kit Pick Up Assembly Pressure Pad Cushion Charge Roll Kit Transfer Roll Kit Label Fuser Wiper Pick Tires	X644X11A X644X01A X644H11A X644H01A X644A11A X644X21A X644H21A X644A21A 40X0454 40X0453 40X0466 40X0127 40X0130 40X2665 40X0070
Media	Transparencies (letter)	70X7240
Furniture	Low Profile MFP Stand MFP Stand with Cabinet MFP Stand with Cabinet (10 in. high) MFP Stand Printer Base	16C0379 16C0369 22G0551 16C0389 22G0544
Connectivity	External Print Servers N4050e Wireless 802.11g Print Server ² Internal Print Servers ³ MarkNet N8020 Gigabit Ethernet MarkNet N8030 Fiber Ethernet MarkNet N8050 802.11g Wireless	14T0145 14S0200 14S0220 14S0165
Adapters	Parallel 1284-B Interface Card RS-232C Serial Interface Card	1021091 1021092
Cables	10-foot Parallel Cable 6-foot USB Cable	1021231 1021294
Memory options	128MB DRAM 256MB DRAM 512MB DRAM 32MB Flash Card 64MB Flash Card	13N1523 13N1524 13N1526 1021208 1021209

¹ Declared yield in accordance with ISO/IEC 19752.

² Requires USB connection.

³ Use of an Internal Print Server disables the Ethernet card resident in the printer.